
call centre









www.dams.com



The structure of an object cannot be regarded detached from a technical, economic, social and cultural context.

Call centre desk tops are manufactured from 25mm board and available in five standard finishes. All MFC (melamine faced chipboard) used, meets BS 476 PT7 class 1 surface spread of flame, as well as E1 European Formaldehyde Emission. Edging used is ABS wood grain, with a thickness of 3mm.

Radial legs are 65mm diameter. Powder coated and finished in Ral 9006.

Cable management can be found in the desk tops in the form of a 65mm radial cable port. Cables can be passed through the spacers at the back of the tower pedestals. The central core has removable doors allowing easy access to data and power cables.

Granite narrow pedestals form part of the overall structure of the call centre ranges. These are available with optional doors in the five standard colours.

Screens are manufactured from 25mm MFC, upholstered with foam and fabric. Please refer to Dams Fabric Swatch.







Index

introduction	Page 02
8 person call centre	Page 04
6 person call centre	Page 06
3 person call centre	Page 08
configurations	Page 10
finishes	Page 11

8 person call centre

Call Centre design that's as versatile as your imagination.



▲ Narrow pedestals available with or without doors.



Customise to suit any requirements.



www.dams.com

Main picture

Eight person call centre supported with open front narrow CPU pedestals: LC 8PL

Screens: 8xCCS

Meeting tables: 4xMMT





Main picture

Six person call centre supported with open narrow CPU pedestal: LC6P

> Screens: 6xCCS

Meeting tables: 3xMMT



▲ Ideal for cabling from ceiling.



6 person call centre

Team - working means sharing a big part of your with others. Desk mounted screens help reduce the level of noise, while at the same time creating individual space.



Braked castors.



Cable Management and Telecommunications can be fed to the work surface areas from the central core.



Mobile meeting tables increase your desk top space.

3 person call centre

A more positive attitude to work is an added bonus. Designed to maximise the use of walls, we recommend that if choosing support pedestals, you select a 'CPT' pedestal from the Dams Largo range for storage to the 3rd workstation.



▲ Stylish and elegant metal handles.







▲ Easy access to cabling.



團 66 1.1.1 Ī

Feature shot

Three persons call centre: LC3P


Screens: 4xCCS



▲ 65mm radial leg finished in RAL 9006.


call centre specifications

3 person call centre configuration




- LC3PL 3 Person Call Centre with Radial Leg Support.
- LC3P 3 Person Call Centre with Open Narrow Pedestal.
- LC3PD 3 Person Call Centre with Narrow Pedestals and Doors.

6 person call centre configuration



- LC6PL 6 Person Call Centre with Radial Leg Support.
- LC6P 6 Person Call Centre with Open Narrow Pedestal
- LC6PD 6 Person Call Centre with Narrow Pedestals and Doors.

8 person call centre configuration

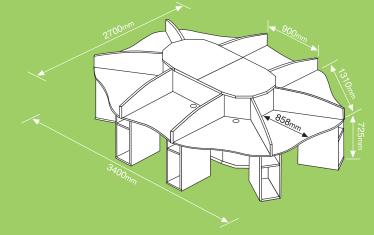

- LC8PL 8 Person Call Centre with Radial Leg Support.
- LC8P 8 Person Call Centre with Open Narrow Pedestal.
- LC8PD 8 Person Call Centre with Narrow Pedestals and Doors.

construction

Steelwork

Radial legs are 65mm diameter. Powder coated and finished in Ral 9006.

Desktops

Call centre desk tops are manufactured from 25mm board and available in 5 standard finishes (see below). All MFC (Melamine Faced Chipboard) used, meets BS 476 PT7 class 1 surface spread of flame, as well as E1 European Formaldehyde Emission. Edging used is ABS wood grain, with a thickness of 3mm.

Cable Management

Cable management can be found in the desk tops in the form of a 65mm radial cable port. Cables can be passed through the spacers at the back of the tower pedestals. The central core has removable doors allowing easy access to data and power cables.

Pedestals

Granite narrow pedestals form part of the overall structure of the call centre ranges. These are available with optional doors in the 5 standard colours (see below).

Desking Screens

Screens are manufactured from 25mm (Melamine Faced Chipboard), upholstered with foam in a choice of fabrics.

finishes

pedestal

Standard colour only.

desktop & doors

Choice of five stock colours.

